

VEGAWAVE 62

NAMUR

Vibrating level switch with suspension cable for powders



Application area

The VEGAWAVE 62 is a level switch for universal use in powders and fine-grained bulk solids. The VEGAWAVE 62 detects reliably and robust the min. or max. level. The tuning fork is ideal for use either in adhesive and abrasive products as well as in bulk solids with very low density. The position of the switching point can be determined flexibly via the length of the suspension cable.

Your benefit

- Minimum time and cost expenditure thanks to simple setup without medium
- · Reliable function due to product-independent switching point
- · Low maintenance costs thanks to robust design

Function

With the VEGAWAVE 62 series, the tuning fork is used as sensor element. If the medium covers the tuning fork, the amplitude is damped. The electronics detects this damping and converts it into a switching command.

Technical data

| Process pressure | -1 +6 bar/-100 +600 kPa (-14.5 +87 psig) |
|------------------------------------|--|
| Process temperature | -40 +150 °C (-40 +302 °F) |
| Density | > 0.008 g/cm ³ (0.0003 lbs/in ³) |
| Ambient temperature on the housing | -40 +80 °C (-40 +176 °F) |
| Storage and transport temperature | -40 +80 °C (-40 +176 °F) |
| Hysteresis | approx. 2 mm (0.08 in) with vertical instal- lation |
| Process fitting | Thread from G1½, 1½ NPT, flanges from DN 50, 2" |
| Operating voltage | for connection to an amplifier according to NAMUR IEC 60947-5-6, approx. 8.2 V |
| Off-load voltage | U_0 approx. 8.2 V |
| Short-circuit current | I _u approx. 8.2 mA |
| Switching delay | When being covered: 0.5 s, when being uncovered 1 s |
| SIL qualification | Optionally up to SIL2 |

Materials

The wetted parts of the instrument are made of stainless steel 316L. The suspension cable is made of PUR or FEP. The supplied process seal is made of Klingersil C-4400.

You will find a complete overview of the available materials and seals in the "configurator" on our homepage at <u>www.vega.com/configurator</u>.

Housing versions

The housings are available in plastic, stainless steel or Aluminium. They are available with protection ratings up to IP 67.

Electronics versions

The instruments are available in different electronics versions. Apart from the versions with transistor output, contactless electronic switch and relay output, a two-wire version for connection to a signal conditioning instrument and a NAMUR version are also available.

Approvals


The instruments are suitable for use in hazardous areas and are approved, for example, according to ATEX, FM, CSA and IEC. You can find detailed information on the existing approvals in the "*configurator*" on our homepage at <u>www.vega.com/configurator</u>.



Specification sheet

Operation


The mode and sensitivity of the level switch can be adjusted on the electronics module. A signal lamp shows the switching status of the instrument.



Electronics and connection compartment - NAMUR output

- 1 Potentiometer for switching point adaptation
- 2 DIL switch for characteristics reversal
- 3 Simulation key
- 4 Ground terminal
- 5 Connection terminals
- 6 Control lamp

Electrical connection

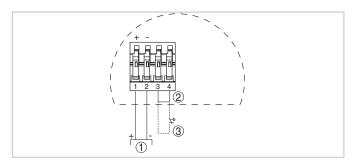


Wiring plan

- 1 NAMUR amplifier
- 2 Bridge
- 3 External simulation key

You can find details on electrical connection in the instrument operating instructions on our homepage at <u>www.vega.com/downloads</u>.

Dimensions

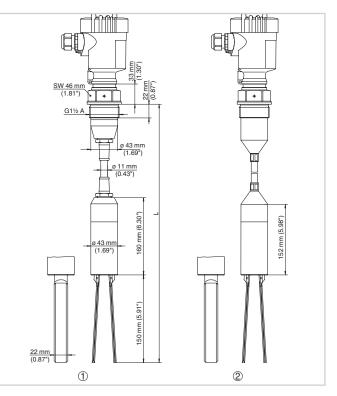

- 1 Version with PUR suspension cable
- 2 Version with FEP suspension cable

Information

You can find further information on the VEGA product line on our homepage <u>www.vega.com</u>.

In the download section under <u>www.vega.com/downloads</u> you'll find free operating instructions, product information, brochures, approval documents, instrument drawings and much, much more.

Instrument selection

With the "*Finder*" at <u>www.vega.com/finder</u> and "*VEGA Tools*" you can select the most suitable measuring principle for your application. You can find detailed information on the instrument versions in the "*Configurator*" at <u>www.vega.com/configurator</u> and "*VEGA Tools*".

Contact

You can find the VEGA agency serving your area on our homepage www.vega.com.